



Parallel gripper	Three-jaw gripper	Angle gripper	Internal-hole gripper	Other grippers	Electric gripper
GED1302	GED1306	GED1502	GED1506		



Electric three-jaw gripper with T-slot guide

Advantages, benefits, comparisons and tips! Stacks of information all about this product are on page 189.

Gripping force as a function of jaw length

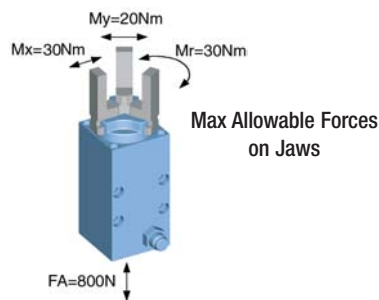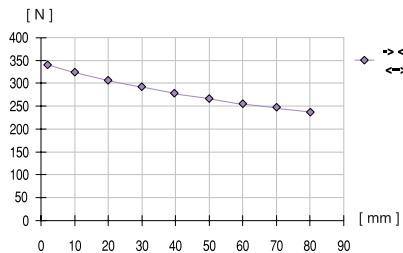

Sommer-automatic
Grippers
Separators
Swivel units
Rotating jaws
Axial compensators
Tool changers
Linear cylinders
Shock absorbers
Rotary cylinders
Air vane motors
Vacuum components
Accessories
Quick finder

Order no.:	
GED1306	GED1306
C	O
Drive:	
Electr.	Electr.
Stroke per jaw [mm]:	
6	6
Gripping force in closing (adjustable) [N]*:	
350	-
Gripping force in opening (adjustable) [N]*:	
-	350
Self-locking via:	
mech. + el.	mech. + el.
Closing time/opening time [s]:	
0,2	0,2
Repeatability ± [mm]:	
0,02	0,02
Voltage [V DC]**:	
24	24
Current max. adjustable via potentiometer [mA]:	
210	210
Min./max. operating temperature [°C]:	
5/80	5/80
Weight [kg]:	
1,700	1,700

All data measured at 210 mA.
 * measured in power stroke at 2 mm before the end of the stroke
 ** Voltage 12 Volt by request.

See Page 189 for Accessory list.

DIN Rail Mountable Controller Included!
 Power supply required

