


**Separators**

VEG14	VEG15	VEG22	VEG23	<b>VE14</b>	<b>VE15</b>	VE22	VE23
-------	-------	-------	-------	-------------	-------------	------	------



Sommer-automatic
Grippers
<b>Separators</b>
Swivel units
Rotating jaws
Axial compensators
Tool changers
Linear cylinders
Shock absorbers
Rotary cylinders
Air vane motors
Vacuum components
Accessories
Quick finder

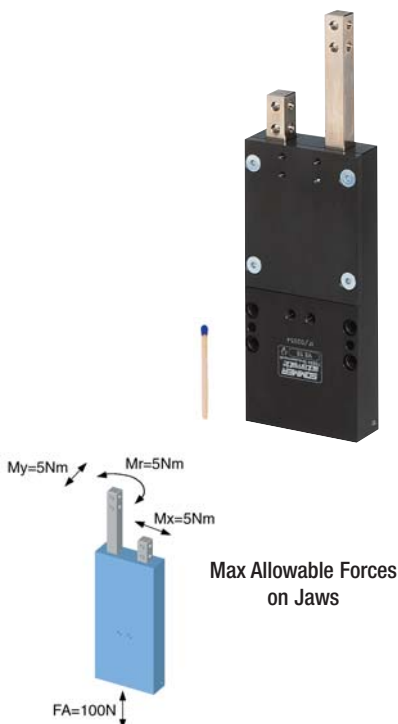

## Separator/Feed escapement

Advantages, benefits, comparisons and tips!  
Stacks of information all about this product are on page 197.

Order no.:	
<b>VE14</b>	<b>VE15</b>
Drive:	
pneum.	pneum.
Stroke per rod [mm]:	
20	40
Force in retraction [N]:	
65	65
Force in extension [N]:	
82	82
Self-locking via:	
mech.	mech.
Entry/departure time [s]:	
0,03	0,03
Repeatability ± [mm]:	
0,1	0,1
Min./max. operating pressure [bar]:	
3/8	3/8
Air volume per cycle [cm <sup>3</sup> ]:	
11	23
Min./max. operating temperature [°C]:	
5/80	5/80
Temp. resistant version up to 150° C [add to part number]:	
T2	T2
Piston diameter [mm]:	
14	14
Weight [kg]:	
0,29	0,46

All data measured at 6 bar.

See Page 197 for Accessory list.

