Rotating jaw
SB40

Advantages, benefits, comparisons and tips!
Stacks of information all about this product are on page 267.

(sold as a pair)

Order no. (rotation angle 90° or 180°):
SB40
Drive:
pneum.
Torque/jaw [Nm]:
0,3
Rotation angle adjustable to 90° and 180° ± [°]:
3
Repeatability ± [°]:
0,5
Radial bearing load [Nm]:
890
Axial bearing load [N]*:
400
Min./max. operating pressure [bar]:
3/7
Air volume per cycle [cm³]:
4
Min./max. operating temperature [°C]:
5/80
Weight/jaw [kg]:
0,7

All data measured at 6 bar/jaw.

* Be careful of the strength of the grippers

See Page 267 for Accessory list.

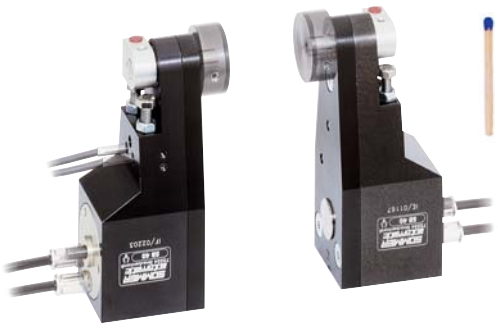

Sommer-automatic
Grippers
Separators
Swivel units
Rotating jaws
Axial compensators
Tool changers
Linear cylinders
Shock absorbers
Rotary cylinders
Air vane motors
Vacuum components
Accessories
Quick finder

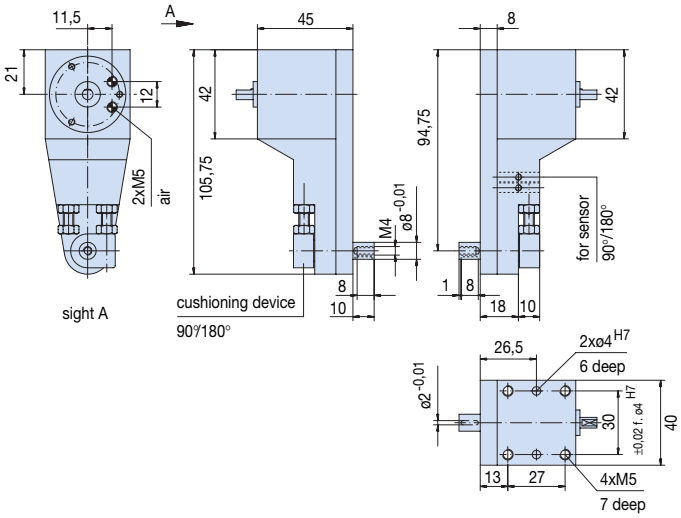

Slotted jaw
Order no.: SB40-1

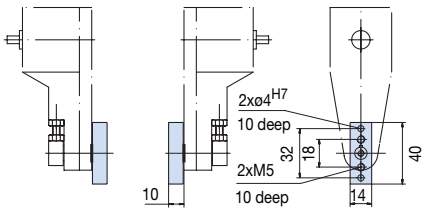
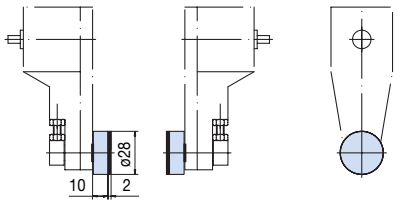
Rubber Jaws
Order no.: SB40-2