


| | | | | | |
|----------------------------|-----------------|--------------------|---------------|----------------------|---------------|
| Accessories 1 | Accessories 2 | Accessories 3 | Accessories 4 | Accessories 5 | Accessories 6 |
| Flow central valves | Pneumatic hoses | Silencers/mufflers | | | |



| |
|--------------------|
| Sommer-automatic |
| Grippers |
| Separators |
| Swivel units |
| Rotating jaws |
| Axial compensators |
| Tool changers |
| Linear cylinders |
| Shock absorbers |
| Rotary cylinders |
| Air vane motors |
| Vacuum components |
| Accessories |
| Quick finder |

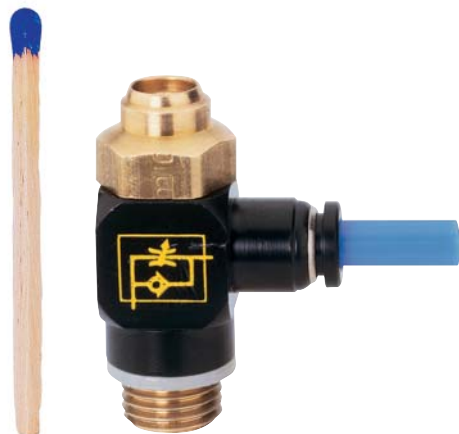

Flow control valves

| Order no.: | | | | | |
|---------------------------------------|--------------|--------------|--------------|--------------|--|
| DRV M5x4 | DRV 1/8x4 | DRV 1/8x6 | DRV 1/4x6 | DRV 1/4x8 | |
| Connection thread Dimension C: | | | | | |
| M5 | 1/8" | 1/8" | 1/4" | 1/4" | |
| Max. outer hose Ø [mm]: | | | | | |
| 4 | 4 | 6 | 6 | 8 | |
| Dimension B [mm]: | | | | | |
| 8,4 | 16 | 16 | 20 | 20 | |
| Dimension L [mm]: | | | | | |
| 15,1 | 20,6 | 23,3 | 23 | 25 | |
| Dimension M [mm]: | | | | | |
| 20 | 34,5 | 34,5 | 37,3 | 37,3 | |

• Plug-in model

Throttling back movements increase the working life of grippers. Now you can set your gripper or actuator to the desired speed by means of a Flow Control Valve.

The valve is screwed into the gripper inlet port. The hose is clamped into the air connection. just push the hose on and it will remain securely fastened. This "quick" connect feature can save you approximately 70% of your assembly time and money.

