

Parallel Gripper Three-jaw gripper **Angle gripper** Internal-hole gripper Other grippers Electric Gripper

GG25 GG32 GG50 GG70 GG100



Sommer-automatic

Grippers

Separators

Swivel units

Rotating jaws

Axial compensators

Tool changers

Linear cylinders

Shock absorbers


Rotary cylinders

Air vane motors

Vacuum components


Accessories

Quick finder

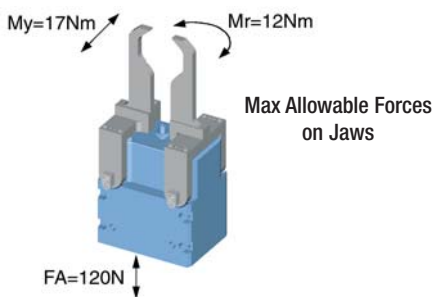

Sealed angle gripper

Advantages, benefits, comparisons and tips! Stacks of information all about this product are on page 143.

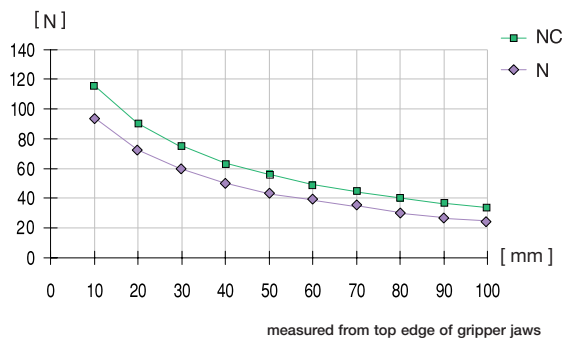

Order no.:		GG25 N	GG25 NC				
Drive:		pneum.	pneum.				
Stroke per jaw [°]:		35	35				
Gripping torque in closing and opening [Nm]:		3,3	-				
Gripping torque in closing [Nm]:		-	4,1				
Self-locking via:		DSV1/8	Spring				
Closing time/opening time [s]:		0,2	0,2				
Repeatability ± [mm]:		0,05	0,05				
Min./max. operating pressure [bar]:		3/10	5/10				
Air volume per cycle [cm³]:		13	13				
Min./max. operating temperature. [°C]:		5/80	5/80				
Temp. resistant version up to 150°C [add to part number]:		T	T				
Piston diameter [mm]:		25	25				
Weight [kg]:		0,45	0,50				

All data measured at 6 bar.

See Page 143 for Accessory list.

