


Parallel gripper		Three-jaw gripper		Angle gripper		Internal-hole gripper		Other grippers			Electric gripper	
SCH20	SCH23	ST36	ST40	ZK22	ZK33	GS65	RGO-30	RG10-60	SPG30-95	GF40	GF41	HM



- Sommer-automatic
- Grippers**
- Separators
- Swivel units
- Rotating jaws
- Axial compensators
- Tool changers
- Linear cylinders
- Shock absorbers
- Rotary cylinders
- Air vane motors
- Vacuum components
- Accessories
- Quick finder

6-point gripper for O-ring assembly


Advantages, benefits, comparisons and tips! Stacks of information all about this product are on page 171.

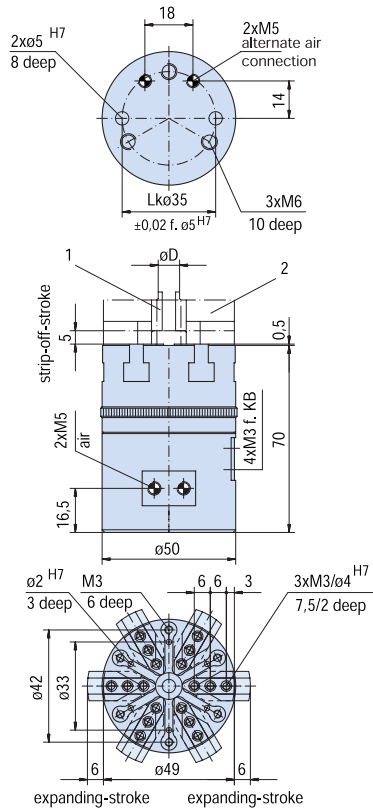

Order no.:	GS65			
Drive:	pneum.			
Opening stroke (adjustable for each jaw) [mm]:	3-6			
Stripping stroke [mm]:	5			
Gripping force in opening [N]:	300			
Self-locking via:	DSV1/8			
Closing time/opening time [s]:	0,05			
Repeatability ± [mm]:	0,1			
Min./max. operating pressure [bar]:	4/8			
Air volume per cycle [cm ³]:	7			
Min./max. operating temperature [°C]:	5/80			
Temp. resistant version up to 150° C [add to part number]:	T1			
Piston diameter [mm]:	25			
Weight [kg]:	0,55			


All data measured at 6 bar.

Ejector Jaws Order no.: UB65-3



Ejector jaws (screws are included in the scope of delivery) order-no. UB 65-3


Blank Jaws Order no.: UB65-2



Non machined jaws for O-ring seal ø20-60 mm

(Jaws sold in sets of 6)

Opening/Expanding Jaws Order no.: UB65-1 (Aluminum) Order no.: UB65-4 (Steel)



Jaws for O-ring seal ø4-20 mm