

Separators


VEG14	VEG15	VEG22	VEG23	VE14	VE15	VE22	VE23
-------	-------	--------------	--------------	------	------	------	------



Separator/Feed escapement

Advantages, benefits, comparisons and tips!
Stacks of information all about this product are on page 197.

Order no.:	
VEG22	VEG23
Drive:	
pneum.	pneum.
Stroke per rod [mm]:	
30	60
Force in retraction [N]:	
170	170
Force in extraction [N]:	
220	220
Entry/departure time [s]:	
0,2	0,2
Repeatability ± [mm]:	
0,05	0,05
Min./max. operating pressure [bar]:	
3/8	3/8
Air volume per cycle [cm ³]:	
20	42
Min./max. operating temperature [°C]:	
5/80	5/80
Temp. resistant version up to 150° C [add to part number]:	
T2	T2
Piston diameter [mm]:	
22	22
Weight [kg]:	
0,430	0,750

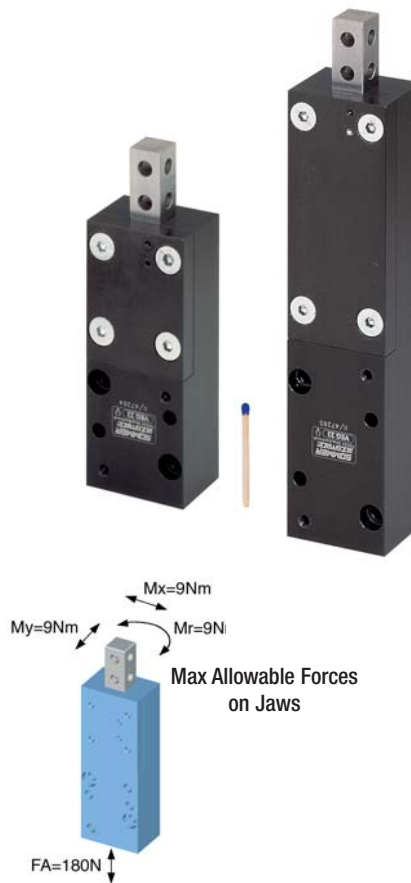

- Sommer-automatic
- Grippers
- Separators**
- Swivel units
- Rotating jaws
- Axial compensators
- Tool changers
- Linear cylinders
- Shock absorbers
- Rotary cylinders
- Air vane motors
- Vacuum components
- Accessories
- Quick finder

All data measured at 6 bar.

See Page 197 for Accessory list

